




HTC Touch Pro CDMA Screen Replacement

Step by step guide of how to tear down the HTC Touch Pro Screen.

Written By: Zhaowei Zhang

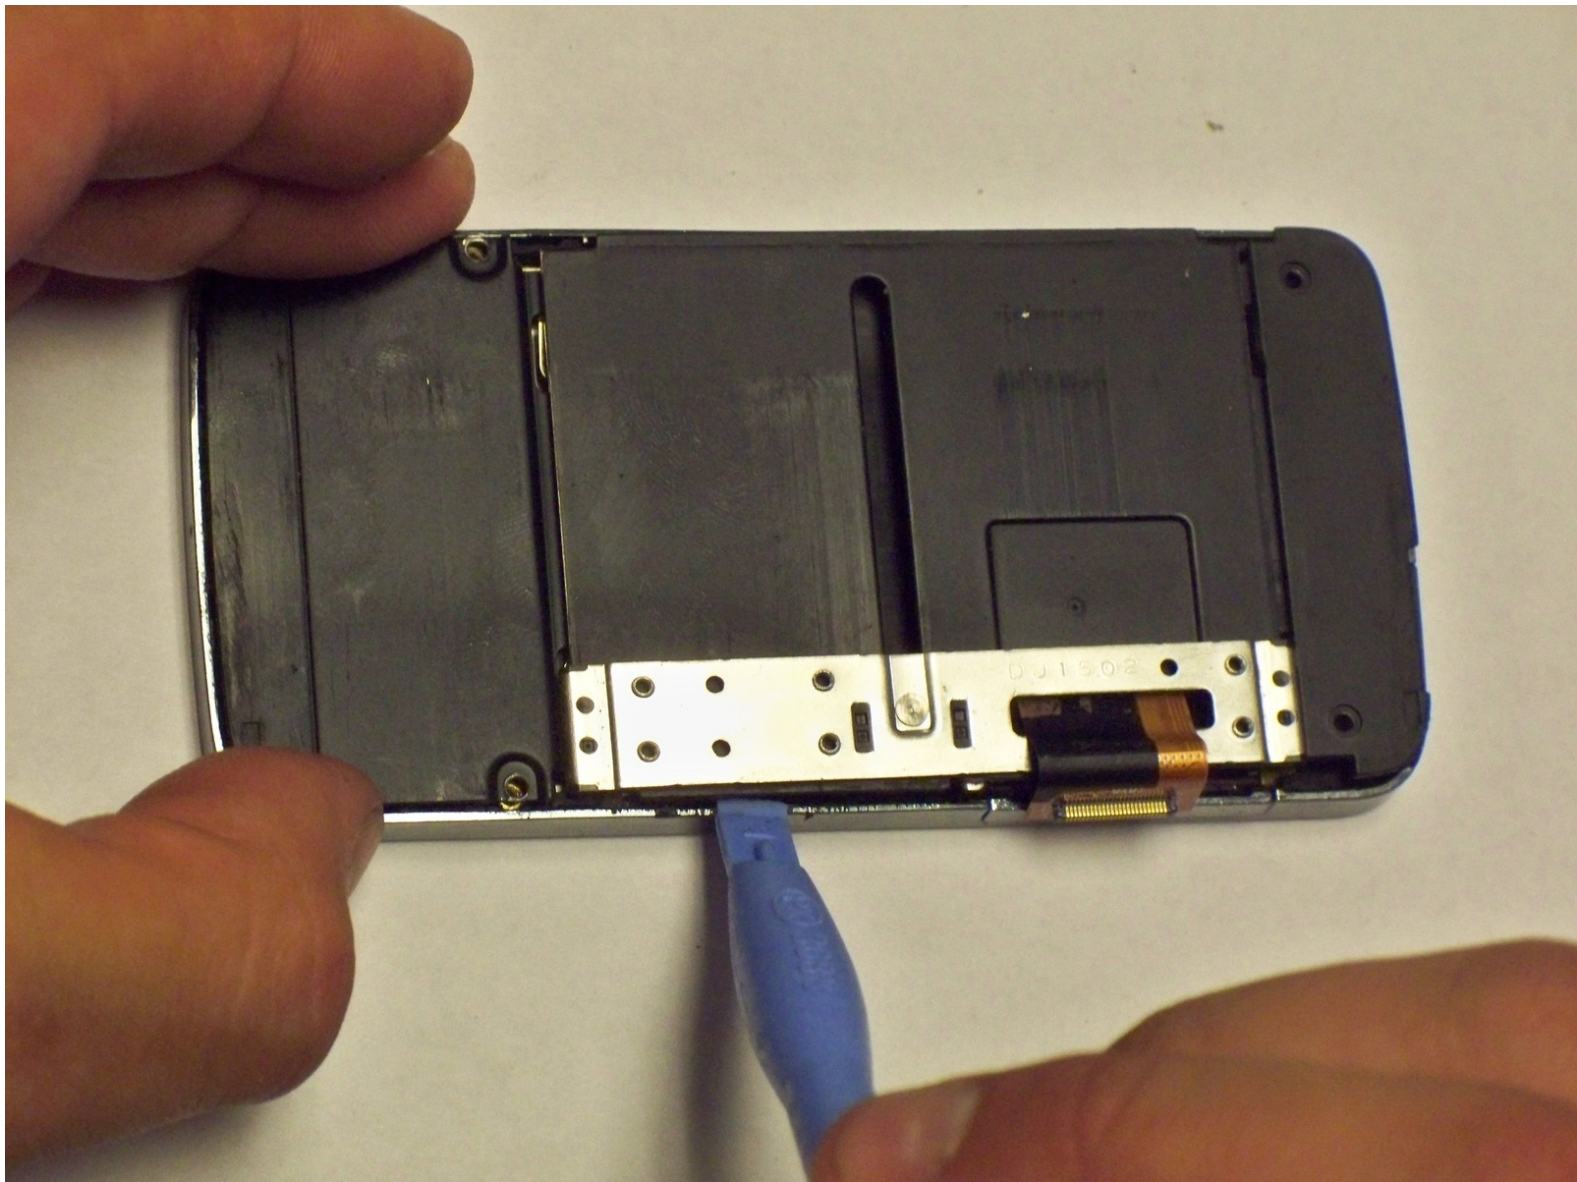

INTRODUCTION

Sometime as part of your device malfunctioned and you would like to replace the part by yourself, this is where this guide come in handy.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery




- Gently press on back plate, push toward camera direction.

Step 2




- Use finger to lift up an edge of battery.

Step 3 — USB Logic Board

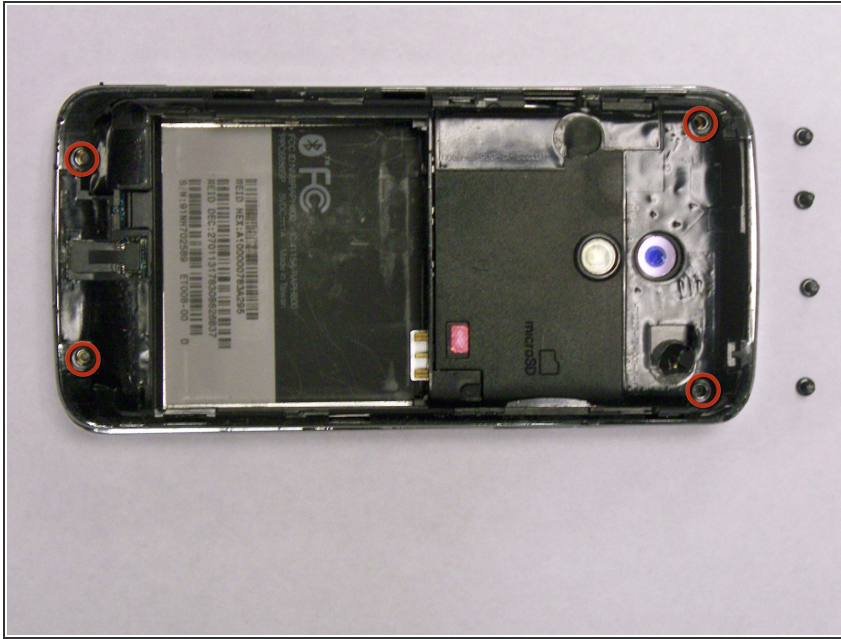


- Remove 4 screws circled in red using T6 screw driver.

Step 4

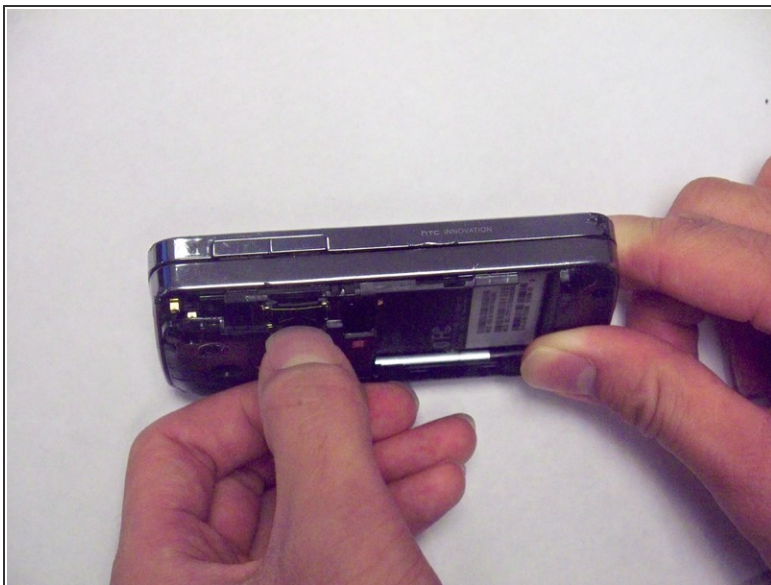



- Lift plastic cover near Memory card slot.

Step 5

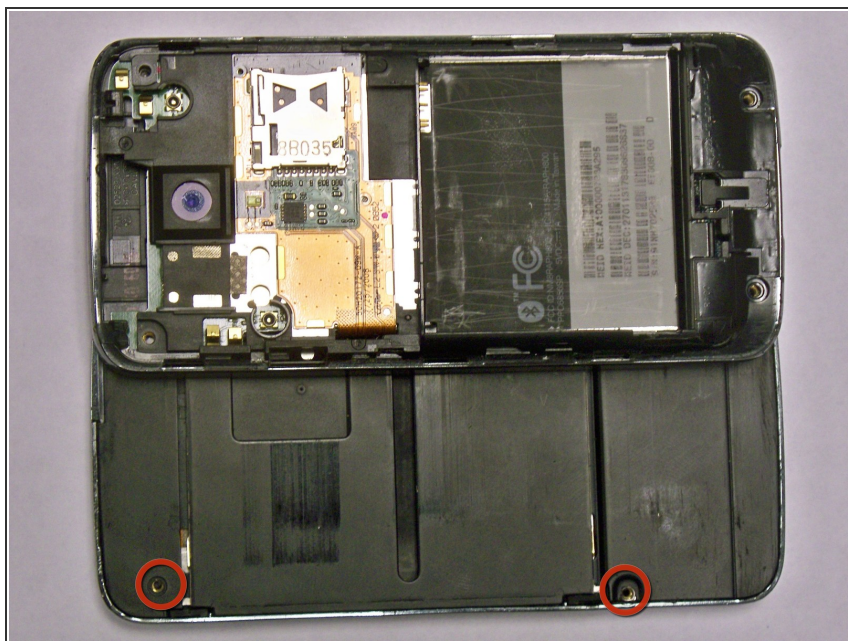



- Remove two Phillips #00 screws from the backside of the screen.

Step 6

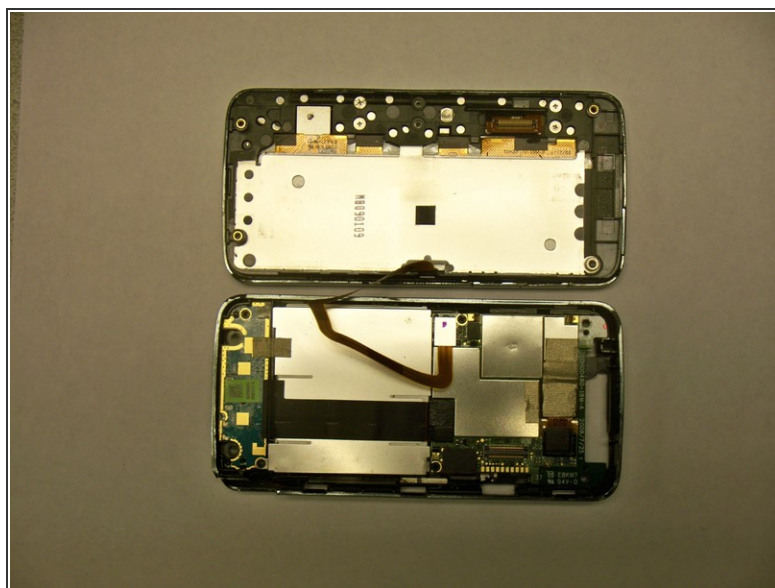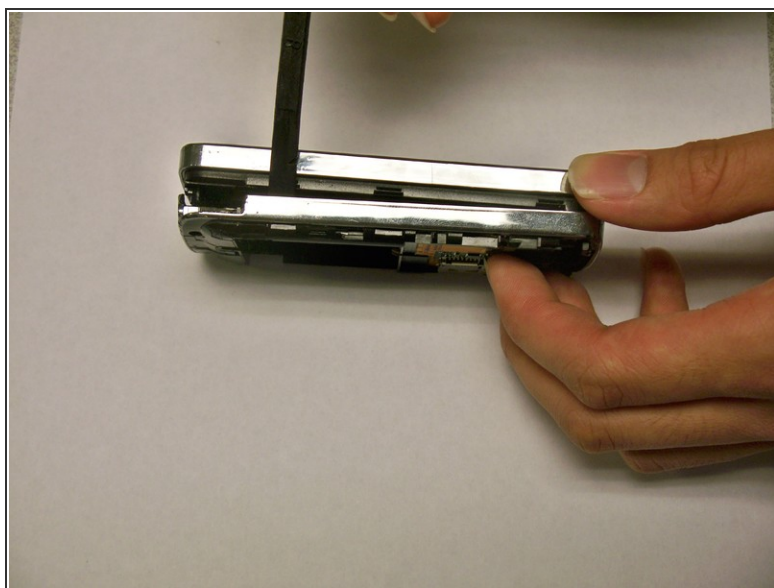



- Insert a spudger or plastic opening tool into the seam on the side of the phone.
- Gently pry apart the two halves of the phone.
- Work your way around the phone until the two halves separate.

Step 7

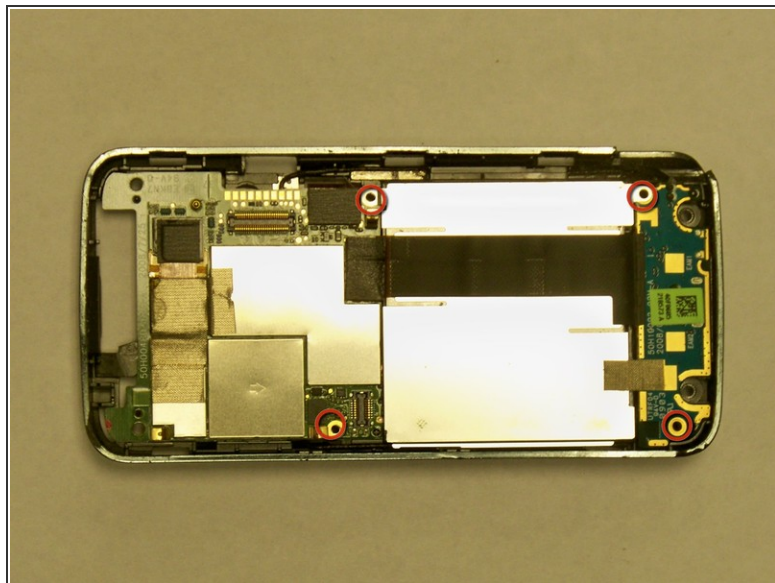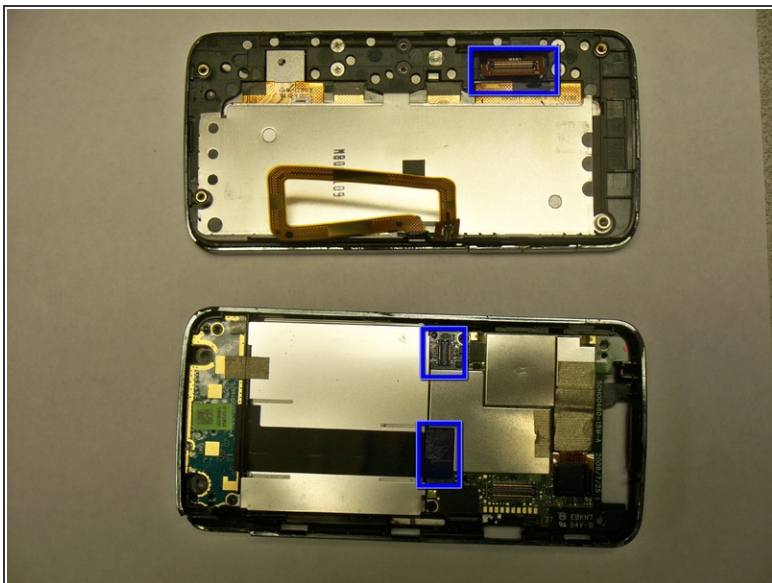

- Gently unplug connectors marked with blue rectangle.
- Remove screws circled in red with 00 Phillip screw driver.



Step 8

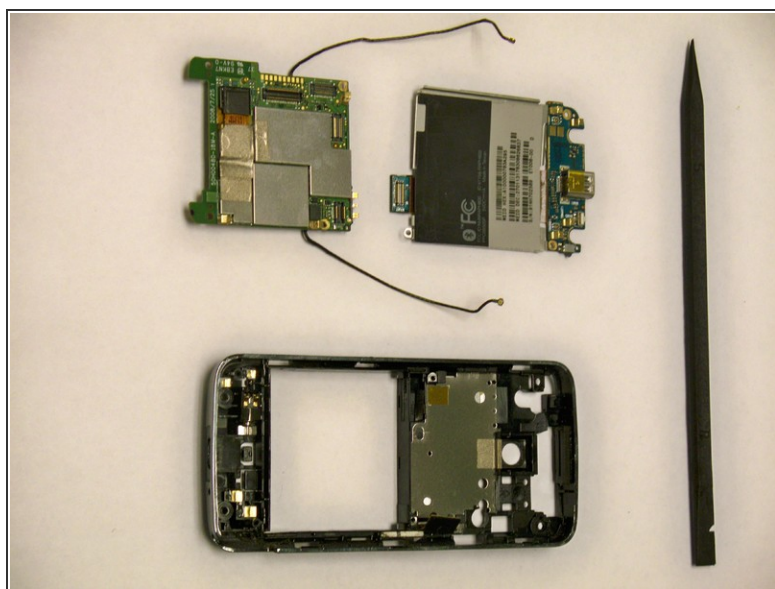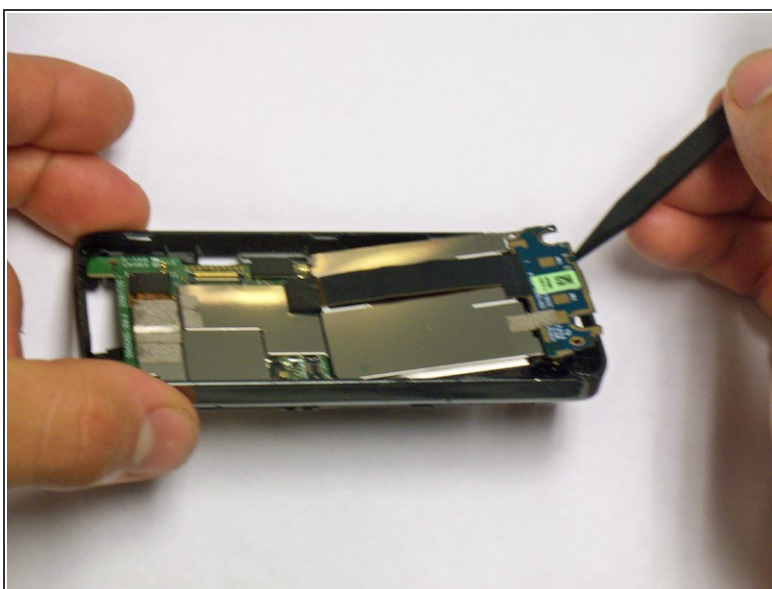

- Gently lift logic board using plastic opener tool.



⚠ Be aware of antenna

Step 9 — Keyboard

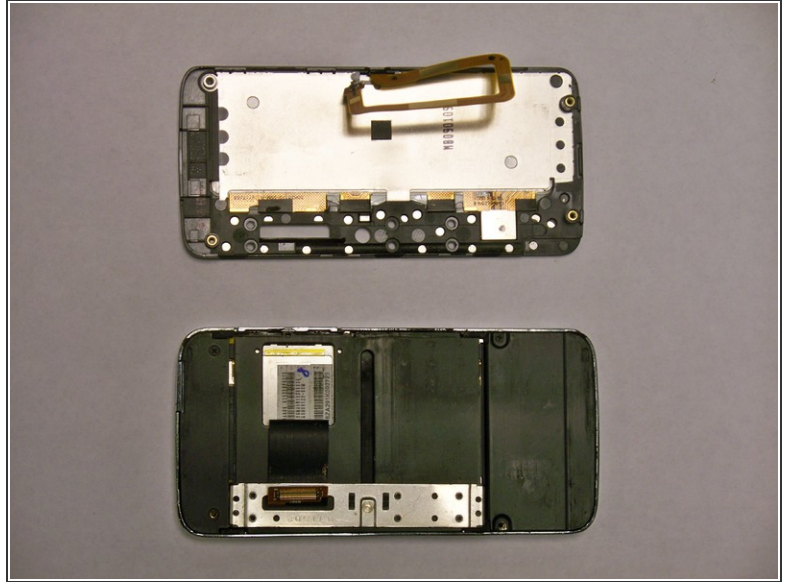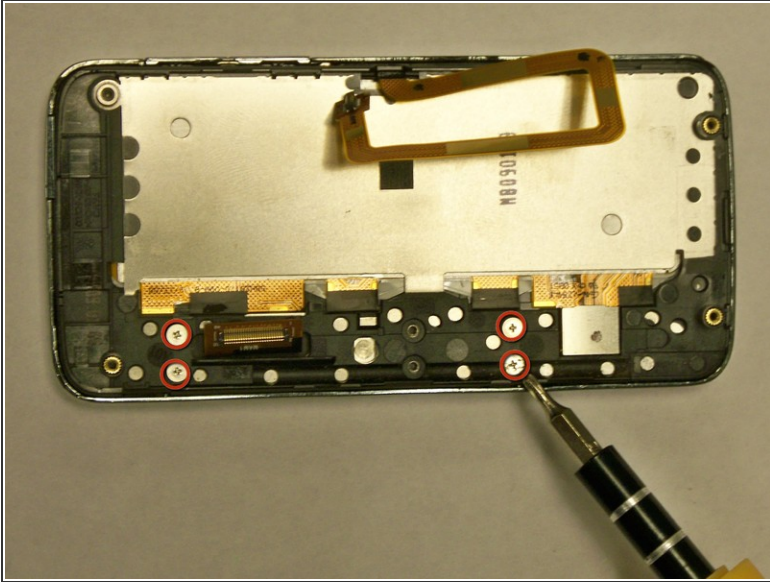


- Remove 4 screws circled in red using 00 Phillip screw driver.

Step 10 — Screen

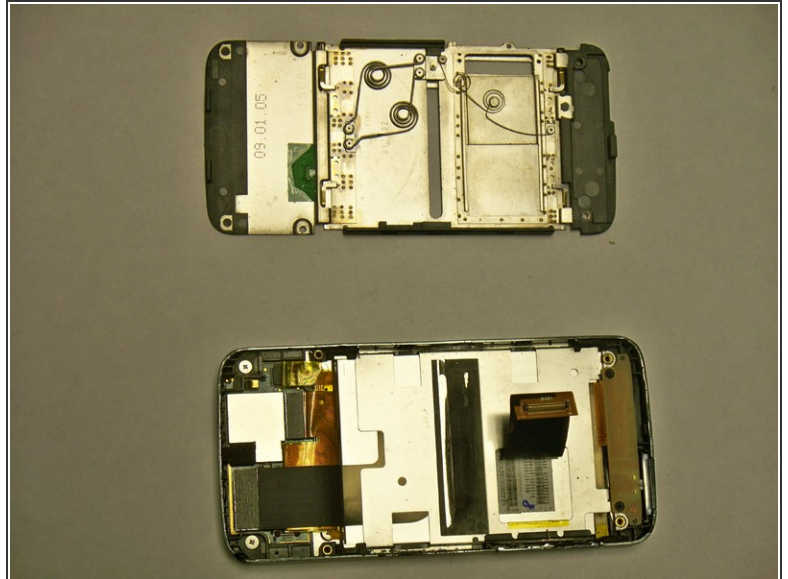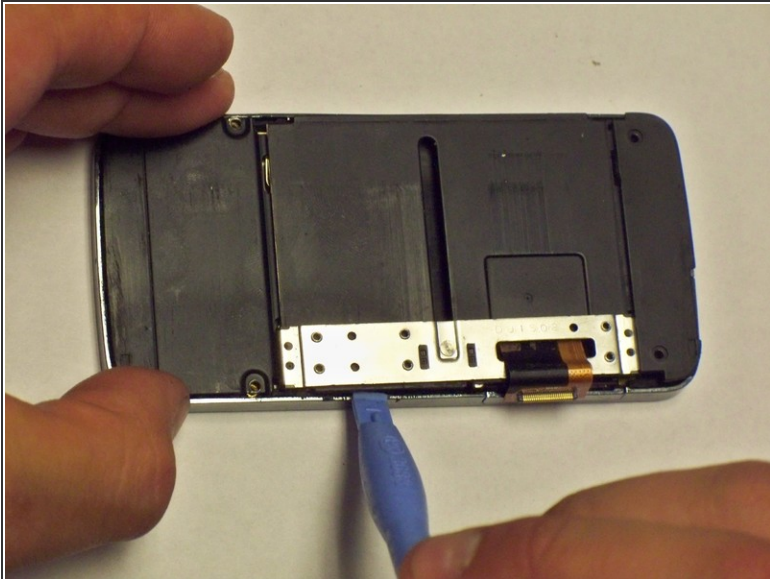

- Lift back plate of screen using finger or plastic opener tool

Step 11

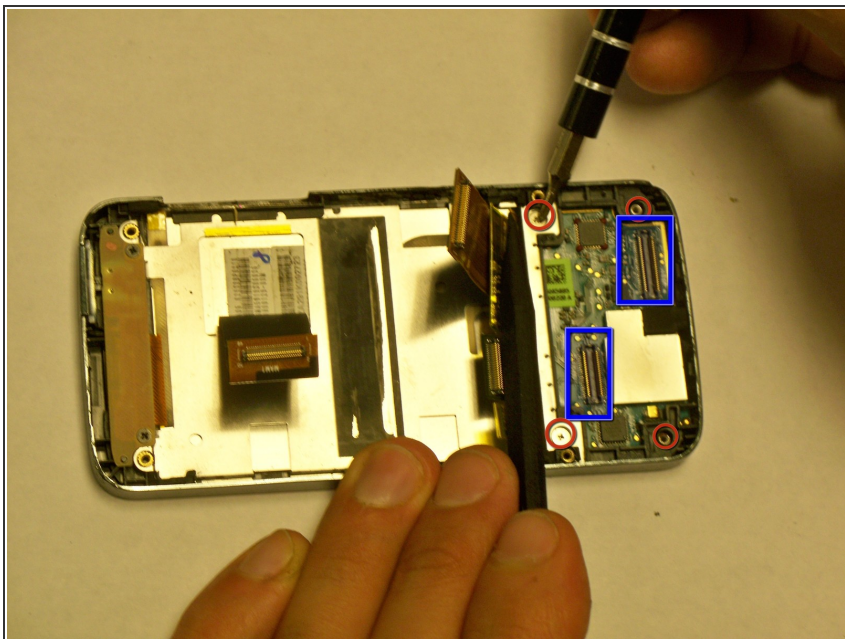



- Gently lift connectors marked with blue rectangles.
- Remove 4 screws marked in red circles using 00 philip screw driver

Step 12



- Lift front keyboard, remove screws circled in red with 00 philip screw driver

Step 13

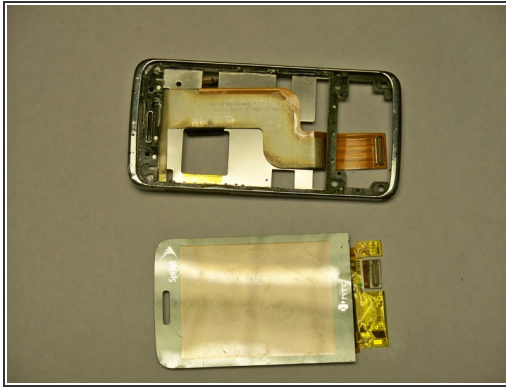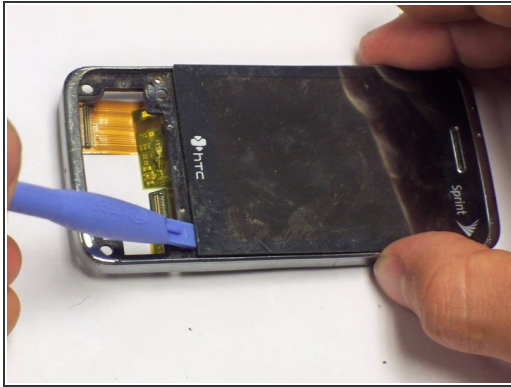

- With front keyboard removed, gently lift screen with plastic opener tool.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-27 11:57:06 AM.